

IDEX
IDEX CORPORATION

BLAGDON PUMP

PTFE PUMPS



■
**Reduce
down-time with
our immediate
availability of
spares for Blagdon
and competitors.**

■
**Confidence
of delivery
99.3%
on-time
delivery 2004.**

■
**Flexible design
and production
meets our
customer's
exacting
standards.**

■
**High quality
products with
certification to
EHEDG, ATEX, ISO.**

■
**Worldwide
technical
representation for
customer's
support.**



**VIRGIN & CONDUCTIVE PTFE ■ CHEMICALLY INERT
FLANGED ■ ATEX APPROVED ■ SOLID CONSTRUCTION**

Chemical • Pharmaceutical • Semiconductor • Petrochemical

for more information, visit our website...

www.blagdonpump.com

BLAGDON PTFE PUMPS

TECHNICAL INFORMATION - SPECIFICATION


FLUID CONNECTIONS	CAPACITY	MAX SOLIDS	MAX. DISCHARGE HEAD	DISPLACEMENT/STROKE
1" ANSI 150 FLANGE ALSO AVAILABLE IN: 1" BSP (F) 1" NPT (F)	0 - 136 Litres/Minute (0 - 30 Gallons/Minute)	3mm (1/8")	88 Metres (289 ft)	0.475 Litres (0.1 UK Gallons)
MAX. WORKING PRESSURE	AIR INLET	TEMPERATURE LIMITS		PUMP WEIGHTS
7.0 Bar (100 psi)	3/8" BSP (F) 3/8" NPT (F)	100°C VIRGIN & CONDUCTIVE		VIRGIN PTFE: 37 KG CONDUCTIVE PTFE: 40 KG

(Technical Specification refers to 1" model.)

BLAGDON CONDUCTIVE PUMPS are available in 1/2" and 1" Virgin PTFE and Conductive PTFE.

PERFORMANCE CURVE

For further details, please contact your Local Distributor.

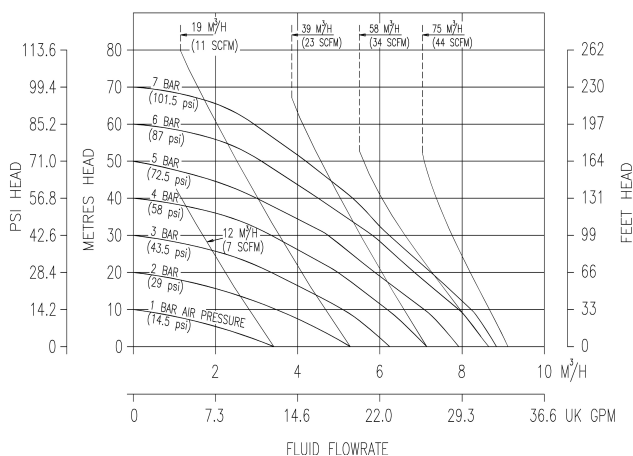

(Performance Curve refers to 1" model.)

**BLAGDON
PUMP**



INVESTOR IN PEOPLE

BLAGDON PUMP HOLDINGS LIMITED

Lambert Road, Armstrong, Washington, Tyne & Wear. NE37 1QP. UK

Tel: +44(0) 191 417 7475 • Fax: +44(0) 191 417 5435

Email: sales@blagdonpump.com

Website: www.blagdonpump.com